


Housekeeping – Work surfaces need to be kept clean and dry. Wet areas need to be covered with non-slip materials. Spills need to be cleaned up promptly and properly. Wet floor signs should be used.

Stairs must have slip-resistant surfaces.

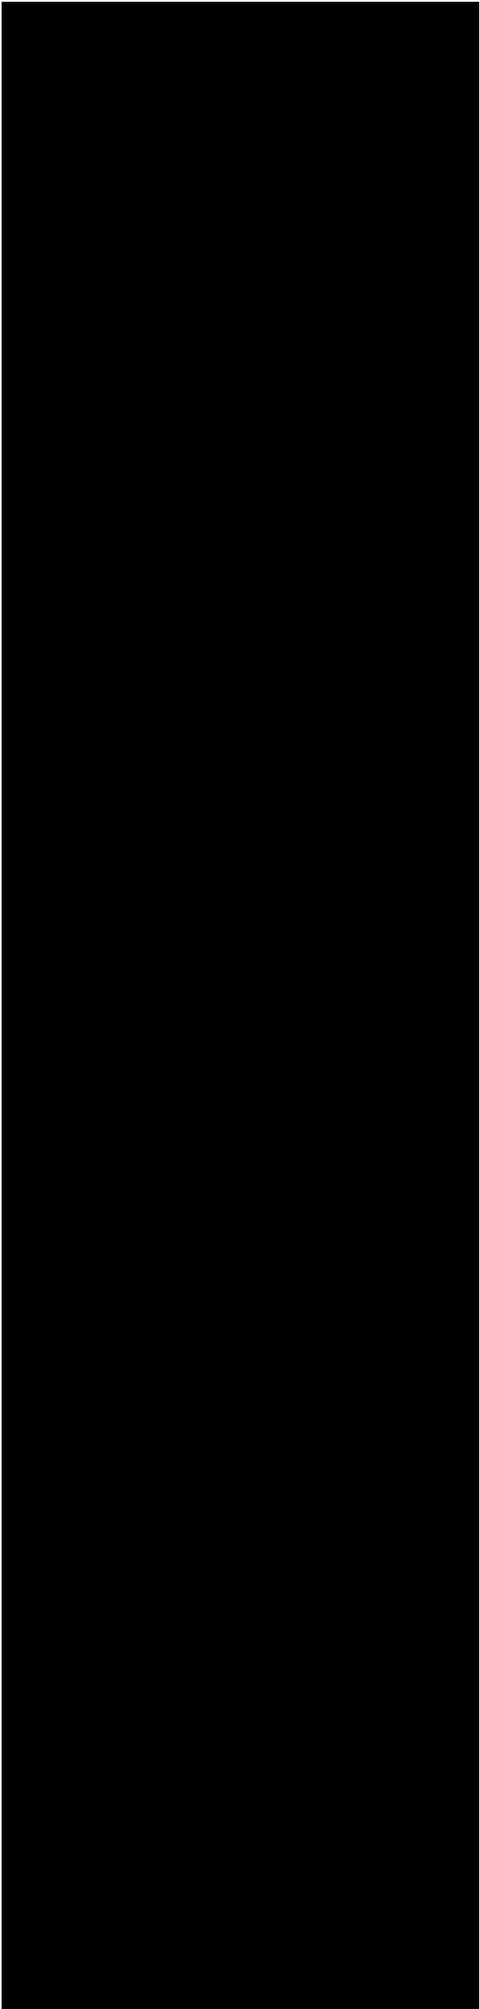

Covers and Guardrails

Covers and/or guardrails shall be provided to protect personnel from the hazards of open pits, tanks, vats, ditches, etc.

1910.22(c)

Floor loading protection


In every building or other structure, or part thereof, used for mercantile, business, industrial, or storage purposes, **the loads approved by the building official shall be marked on plates of approved design which shall be supplied and securely affixed** by the owner of the building, or his duly authorized agent, **in a conspicuous place** in each space to be supthey relate.

Susuplates shall not be removed or defaced but, if lost, removed, or defaced, shall be replaced by the owner or his agent. **1910.22(d)(1)**

It is unlawfuafor you to **place, or cause, or permit to be placed**, on any floor or roof of a building or other structure a **load greater than** that for which susupfloor or roof is**approved** by the building official. **1910.22(d)(2)**


Protection for Floor Openings



Here are some important definitions for this section:

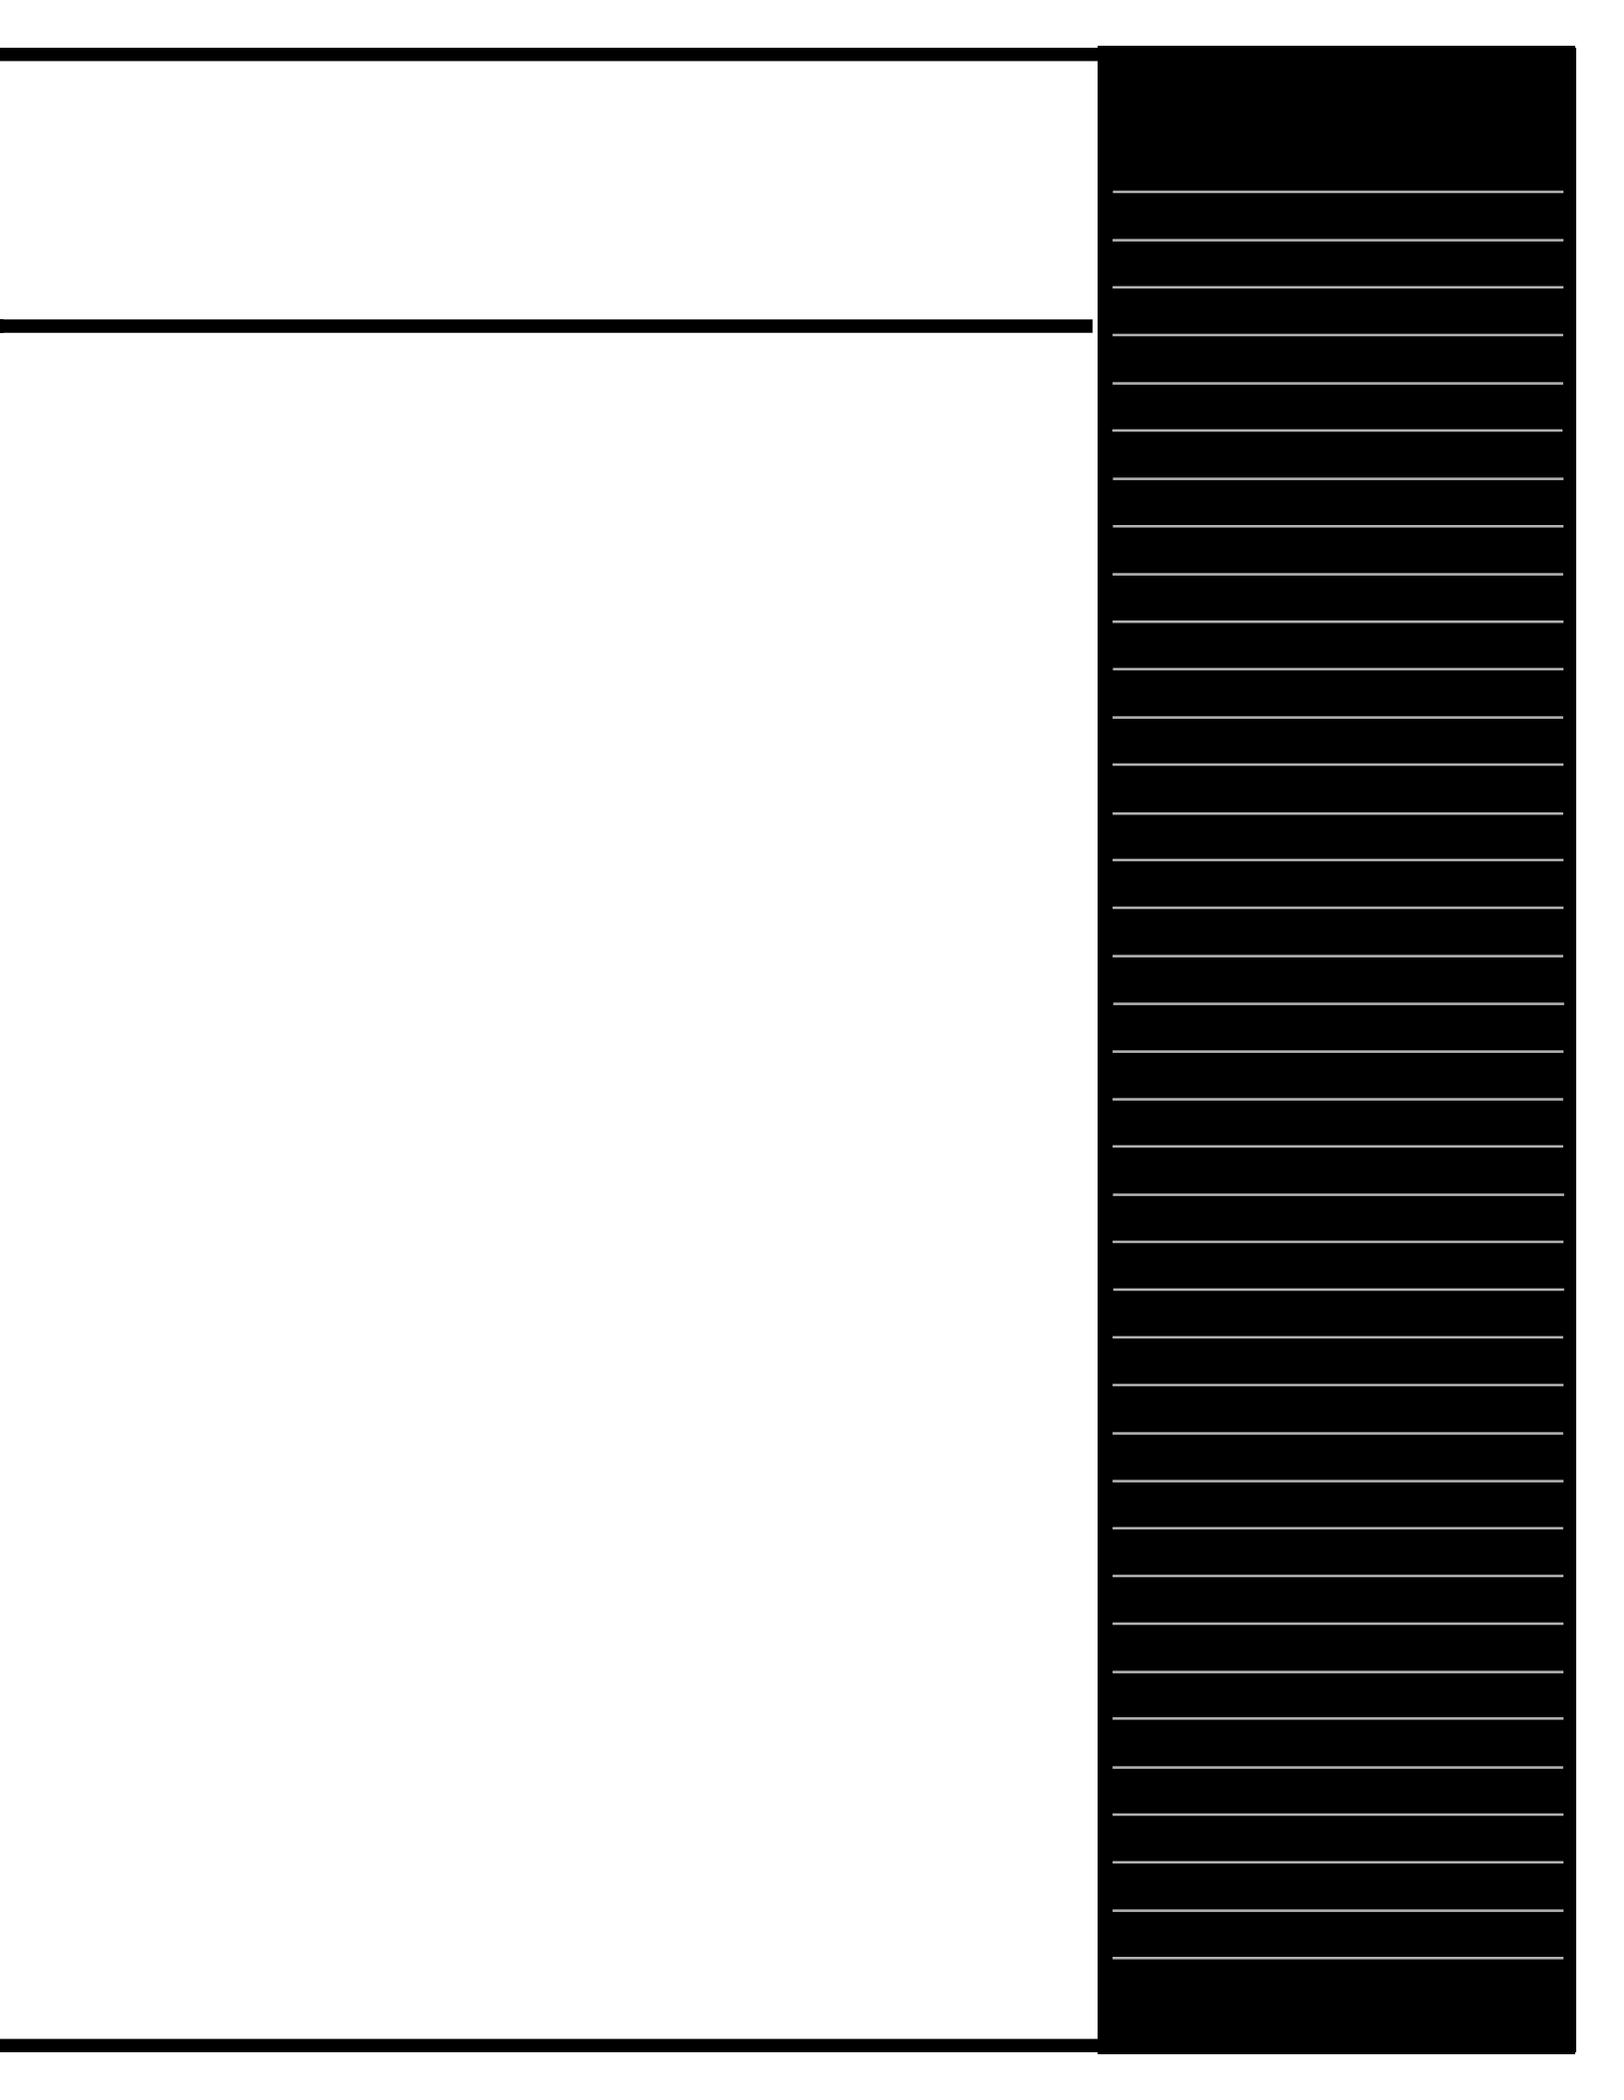



Every **skylight floor opening** and hole shall be guarded by a standard skylight screen or a fixed standard railing on all exposed sides. **1910.23(a)(4)**


Every **pit and trapdoor floor opening**, infrequently used, shall be guarded by a floor opening cover of standard strength and

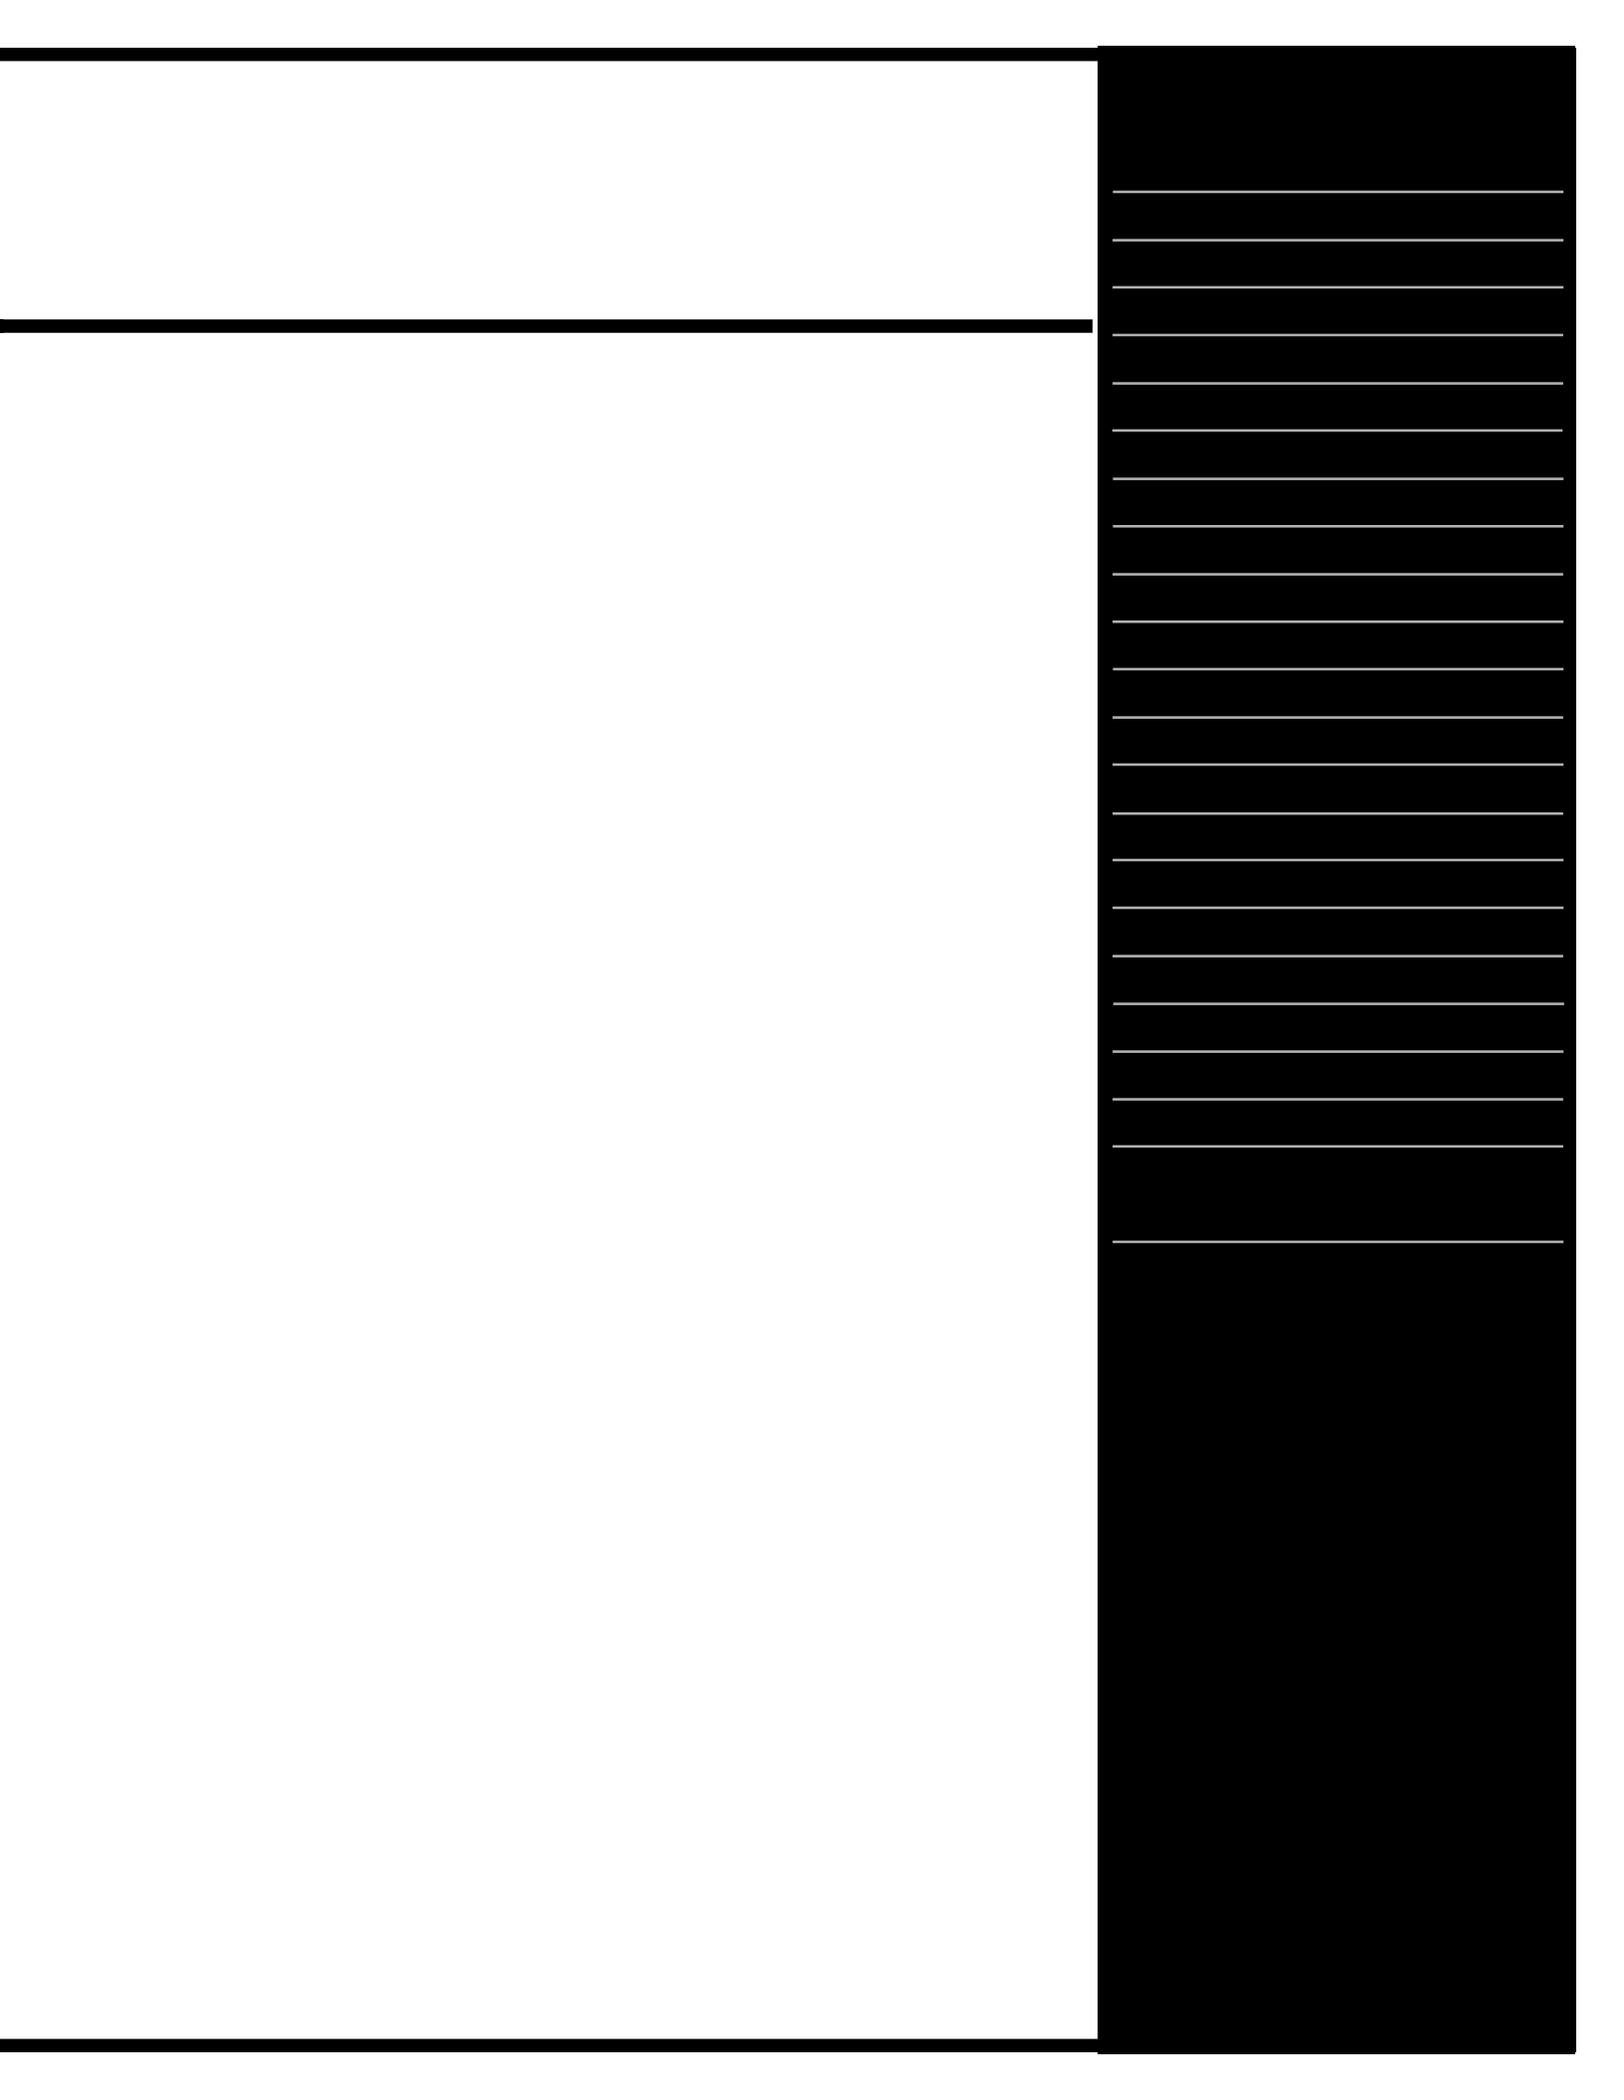




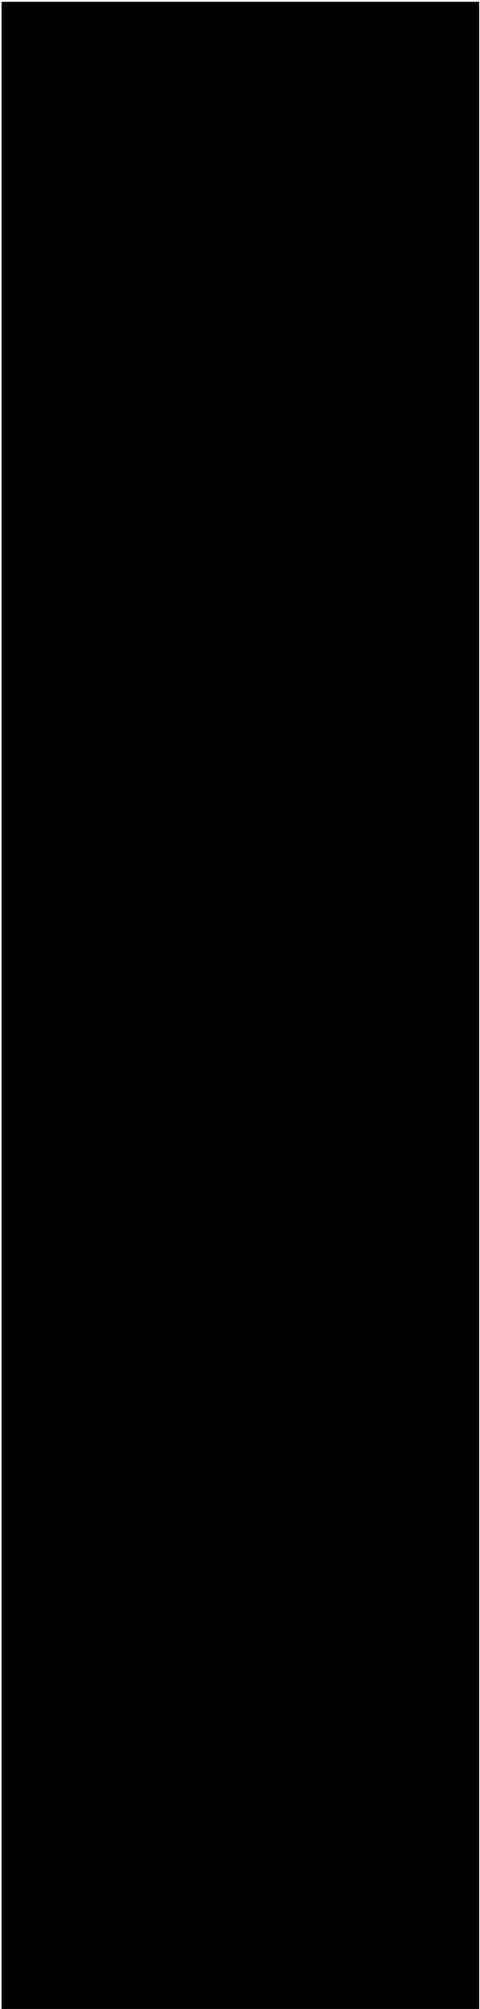



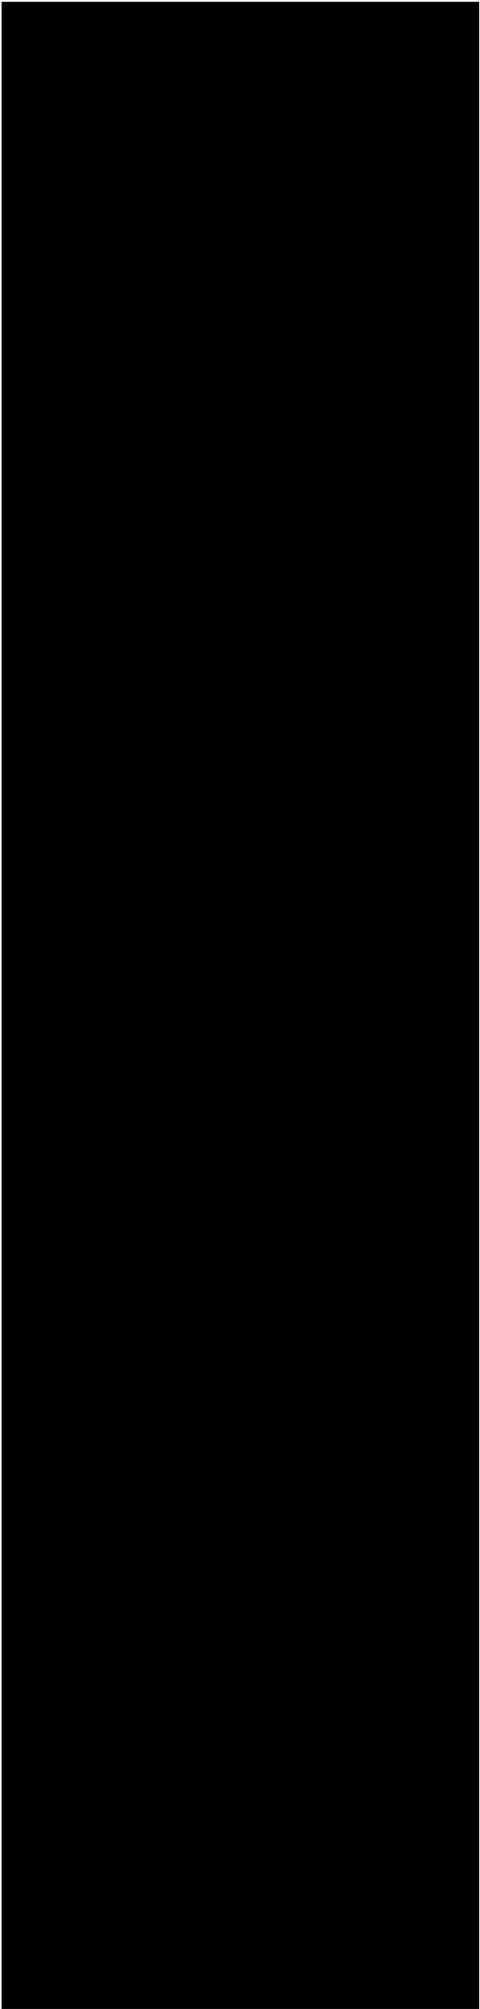






Dockboards (Bridg0 Plates)

Many restaurants hav0 docking areas with dockboards, here are the relevant OSHA rules:

- ◆ Portable and powered dockboards shall be strong enough to carry the load imposed on them. **1910.30(a)(1)**
- ◆ Portable dockboards shall be secured in position, either by being anchored or equipped with devices which will prevent their slipping. **1910.30(a)(2)**
- ◆ Powered dockboards shall be designed and constructed in accordance with Commercial Standard CS202-56 (1961) "Industrial Lifts and Hinged Loading Ramps" published by the U.S. Department of Commerce, which is incorporated by reference as specified in Sec. 1910.6. **1910.30(a)(3)**
- ◆ Handholds, or other effectiv0 means, shall be provided on portable dockboards to permit safe handling. **1910.30(a)(4)**
- ◆ Positive protection shall be provided to prevent railroad cars from being moved while dockboards or bridg0 plates are in position. **1910.30(a)(5)**







[Redacted content]

[Redacted content]